
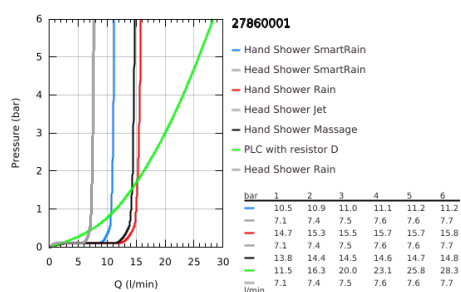


27 860 001 VITALIO JOY SYSTEM 260 SHOWER SYSTEM WITH BATH SAFETY MIXER FOR WALL MOUNTING

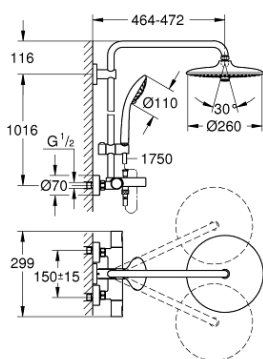

PRODUCT DESCRIPTION (1/2)

- with short shower rail for installation in showers
- horizontal swivable 450 mm shower arm
- distance between thermostat and upper bracket: 1016 mm
- exposed thermostat Precision Joy with Aquadimmer function
- allows change between:
- head shower Vitalio Joy 260 (26 462)
- 3 spray patterns:
- Rain, SmartRain, Jet
- maximum flow rate (at 3 bar): 7 l/min
- with ball joint
- rotation angle $\pm 15^\circ$
- and bath inlet
- separate diverter for hand shower Vitalio Joy 110 Massage (27 319)
- 3 spray patterns:
- Rain, SmartRain, Massage
- maximum flow rate (at 3 bar): 12 l/min
- GROHE SprayDimmer (Stepless flow rate reduction)
- adjustable in height with gliding element
- shower hose VitalioFlex Silver 1750 mm, 1/2" x 1/2" (27 506)
- minimum flow rate 7 l/min.
- GROHE Water Saving - Less water, perfect flow
- GROHE DreamSpray perfect spray pattern
- GROHE Long-Life finish
- GROHE TurboStat compact cartridge

27 860 001 **VITALIO JOY SYSTEM 260 SHOWER SYSTEM WITH BATH SAFETY MIXER FOR WALL MOUNTING**

PRODUCT DESCRIPTION (2/2)

- GROHE SafeStop safety button at 38°C
- GROHE SafeStop Plus optional temperature limiter at 43°C included
- SpeedClean anti-lime system
- Inner WaterGuide for a longer life
- TwistStop to prevent hose from twisting
- suitable for instantaneous heaters from 18 kW/h